

**INDO-MIM PVT LTD.**

#45(P), KIADB Industrial Area, Doddaballapur, Bengaluru - 561203

Phone: +91-080-22048600/636 | FAX: +91-080-27630532

 Email: [infopowders@indo-mim.com](mailto:infopowders@indo-mim.com) or [infohq@indo-mim.com](mailto:infohq@indo-mim.com) | Website: [www.indo-mim.com](http://www.indo-mim.com)

# SS-301L

SS-301L is austenitic stainless steel is an economical and versatile corrosion resistant alloy suitable for a wide range of general-purpose applications. Its chemical composition corresponds to UNS S30100 for use in additive manufacturing processes. Vacuum Induction Melting - Inert Gas Atomization process is used at INDO-MIM for manufacturing of powder. Our unique ASB technique improves powder sphericity, which enhances flowability in achieving consistent density and uniform build rates.

## Particle Size Distribution

Light scattering ( ASTM B822 / ISO 13320-1)				
Application	Size Range	D10%	D50%	D90%
MIM	<22µm	5.0 max	12.0 max	22.0 max
BJ	<25µm	5.5 max	13.5 max	25.0 max
LPBF	15 – 53µm	24.0 max	36.0 max	54.0 max


## Physical Properties

Property	g/cc	Test Method
Tap Density	4.60 min	ASTM B527
True Density	7.70 min	ASTM B923

## Chemical Composition (weight %)

Element	Range (%)
Carbon	0.03 max
Silicon	1.00 max
Manganese	2.00 max
Phosphorous	0.045 max
Sulphur	0.030 max
Nickel	6.00 – 8.00
Chromium	16.00 – 18.00
Oxygen*	0.06 max
Nitrogen*	0.12 max
Iron	Balance

## Morphology

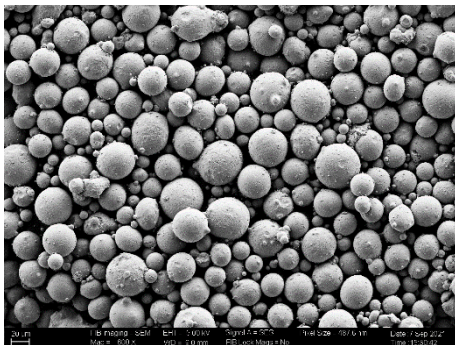

\* Applicable only for LPBF



**Customization** on chemical composition & particle size can be made.

**Packing** with 10 / 50 / 100 kg containers & custom packing is possible.